



Industry
Canada

Industrie
Canada

Canac

Français
Home

Contact Us
Site Map

Help
What's New

Search
About Us

Canada Site
Registration

Strategis Index:

[A](#) [B](#) [C](#) [D](#) [E](#) [F](#) [G](#) [H](#) [I](#) [J](#) [K](#) [L](#) [M](#) [N](#) [O](#) [P](#) [Q](#) [R](#) [S](#) [T](#) [U](#) [V](#) [W](#) [X](#) [Y](#)
[Z](#)

strategis.gc.ca

CIPO  OP

CIPO
HOME

The Canadian Intellectual Property Office

Canadian Patents Database

02/20/2003 - 12:54:03

(12) Patent:

(11) CA 0999950

(54) BLEACH PLANT CONTROL METHOD

(54)

[View or Download Images](#)

ABSTRACT:

CLAIMS: [Show all claims](#)

*** Note: Data on abstracts and claims is shown in the official language in which it was submitted.

(72) [Inventors](#) (Country): ROBINSON, WILLIAM I. (Not Available)
BREWSTER, DONALD B. (Not Available)

(73) [Owners](#) (Country): Measurex Corporation (United States)

(71) [Applicants](#) (Country):

(74) [Agent](#):

(45) [Issued](#): Nov. 16, 1976

(22) [Filed](#):

(43) [Laid Open](#):

(52) [Canadian Class \(CPC\)](#): 341/35 8/79

(51) [International Class \(IPC\)](#): N/A

[Patent Cooperation Treaty \(PCT\)](#): No

(30) [Application priority data](#): None

[Availability of licence](#): N/A

[Language of filing](#): Unknown

Abstract of the Disclosure

A control system for a chlorination plant for paper pulp provides for feed forward control for continuously adjusting the percent applied chlorine to compensate for short and medium term variations in bleach demand of the brown stock. A mathematical model of the process may be adjusted for variable retention time and chlorination temperatures and also accounts for the parallel oxidation and substitution reactions in the bleaching process. A chlorination sensor is also provided which compensates for changes in consistency and has two selected sensing wavelengths.

The present invention relates to a method of bleach plant control and more specifically to a chlorination/extraction control system.

In the paper making process the paper pulp is brightened to a selected target value or Kappa number by bleaching. Kappa number is a measure of the quantity of lignin in the pulp. An essential part of the bleaching process is in the chlorination and extraction stages where chlorine is added to the paper pulp and reacts with the lignin. Lignin is the material in paper pulp which causes its brown appearance and which must be removed to produce white paper or in other words, to produce a Kappa number or brightness of a selected value.

Thus, in theory, it is desired to add the proper amount of chlorine bleach for the amount of lignin present in the pulp currently being inputted into the bleach plant. This inputted pulp is normally termed brown stock. After completing the chlorination and extraction process the bleached pulp has an extracted Kappa or K number which is as close to the target as possible.

Typical bleach plants may have the following stage arrangements

- 1) CEHD
- 2) CEDED
- 3) CEHDED

where

- C = chlorination tower
- E = extraction tower
- H = hypochlorite tower
- D = chlorine dioxide tower

If the first two stages, C and E, are controlled precisely,



the control of the later stages is much easier.

One type of bleach control system which has been used in the past is the "black widow" control system as described in an article by Obenshain in TAPPI, January, 1958, Volume 41, No. 1. In the "black widow" system a photometric sensing device located downstream of the chlorinator feeds back information as to the brightness or Kappa number of the pulp at that point to control a chlorine valve. However, 10 this system does not adequately control the extracted Kappa number since the point at which the sensing device is located is upstream of the chlorination tower and extractor. Thus, it will not easily or adequately compensate for either ambient temperature changes or changes in retention time of the paper pulp in the chlorination process.

Another approach to chlorination is described in an article entitled "A New Approach to In-Line Control of Chlorination" by Jack Strom and Harvey 20 Noyrich in the periodical Pulp and Paper, March, 1972, and in U.S. Patent No. 3,465,550. This system has essentially the same disadvantages as the "black widow" system.

In addition, both of the foregoing approaches use a proportional plus integral analog controller which produces an unstable control loop. P and I controllers are usually detuned to provide a sluggish response because of the danger of process gain or 30 deadtime increasing; if these increase, the control loop becomes unstable.

All of the conventional control methods for bleach plant control have poor control capabilities which either result in high bleaching costs because

of the excess use of chemicals, and concomitantly pollution problems, and also results in poor control of brightness.

Ideally for perfect control, a pure feed forward system would be used where the amount of lignin in the incoming pulp is carefully measured and the proper amount of chlorine is then added to react with the measured lignin to produce the desired amount of bleaching or brightness. This cannot be done since the amount of lignin cannot be successfully measured.

Moreover, the effect of the chlorine which has been added can be measured. But, again a pure feedback control system cannot be used since the total time for a typical chlorination/extraction process may range from 2 to 3 hours. This includes the time in a chlorine mixer, a chlorine tower and an extraction tower.

It is, therefore, a general object of the present invention to provide an improved control system for a bleach plant.

It is another object of the invention to provide a chlorination/extraction control system which provides improved regulation of extracted Kappa number and hence brightness.

It is another object of the invention to provide an improved method of sensing chlorination.

It is another object of the invention to provide a chlorination sensor in a system as above which automatically compensates for changes in consistency.

The present invention provides a method of controlling the extracted Kappa number of paper pulp in a process having a continuous flow of such pulp through premixing means where a bleaching agent is added and partial bleaching takes place and through reactor means to substantially complete such bleaching said pulp being sus-

999950

ceptible to the concentration of lignin which is unmeasurable by itself which affects said Kappa number and where said pulp is subjected to said bleaching agent in said premixing means and said reactor means which affects said Kappa number said method comprising the following steps: sensing a color value related to said Kappa number after said material has been subjected to said bleaching agent in said premixing means; providing a prediction model which in response to said sensed value, the amount of bleaching agent added, and temperature and retention time in said premixer and reactor means, predicts the future value of said Kappa number after being withdrawn from means relative to the present amount of bleaching agent being added; and comparing said predicted future value after being withdrawn from the reactor means with a set point reference and changing said amount of bleaching agent in response to a lack of comparison.

Figure 1 is a block diagram of both the actual process for chlorination/extraction of paper pulp along with a functional block diagram of the process which the associated computer controls.

Figure 2 is a simplified schematic of the chlorination sensor of Figure 1.

Figure 3 is a set of characteristic curves useful in understanding the operation of the sensor of Figure 2.

Figure 4 is a set of curves useful in understanding the operation of the process of Figure 1.

Figure 5 is a more detailed block diagram of Figure 1.

In Figure 1 there is shown in the process portion 10 a typical chlorination/extraction plant. Portion 11 is either a computer or special purpose

999950

control unit which controls the operation of the plant
portion 10.

Specifically, the portion 10 includes a chlorination premixer unit 12 which has as inputs the brown stock paper pulp flow on line 13 and chlorine flow on a line 14 which is controlled by a valve arrangement 16. The percent of chlorine applied to the brown stock, of course, is a major factor in determining the extracted Kappa number or final brightness at the output 17 at the end of the process. The chloring premixer 12 may have a retention time of 20 seconds to five minutes. The transfer function of the premixer is represented by the mathematical notation $G_1(z)$. The z transform function is somewhat similar to a Laplace transform function except that instead of being a continuous variable the z transfer function is based on periodic samples; e.g., every second.

The output of the chlorine premixer which is normally a continuous flow is fed to a chlorine tower 18 and then to an extraction tower 19 both of which are essentially plug flow reactors. The total transfer function of the combined chlorination/extraction process is represented as $G2(s)$ and represents a time delay of from two to three hours. At the output of the chlorination premixer 12 is a chlorination sensor 21 which senses the color of the partially reacted pulp after having been subjected to the injected chlorine for the retention time of the premixer. The sensor output has been designated DS. The chlorination process continues in the chlorine tower 18. The reaction products are extracted in extraction tower 19 where the final extracted Kappa number is reached.

Referring now to the computer portion 11

899950

10

• 20

30



803950

extracted Kappa number set point is compared with the actual value and any error drives a predictor update unit 25 designated with a function $D2(z)$. Output 27 of this predictor in essence provides a feedback bias which when combined with the predicted extracted Kappa number, \hat{EK} , provides on line 28 a Kappa number updated for slow drifts. This is combined with a line 29 which has the current extracted Kappa number set point or target, the difference then providing
10 an error signal on line 30 to drive a chlorine controller 31. This controller has a characteristic $D1(z)$ which is designated to compensate for the delayed measurement of the chlorination sensor 21. In other words, the controller 31 has a control algorithm $D1(z)$ which is a sampled-data, dead-time compensated control algorithm. The output of controller 31 on line 32 drives the chlorine valve control unit 16 in accordance with the error on line 30.

Delay unit 24 incorporates a mathematical
20 model $G2(z)$ which is the retention time of the entire chlorination/extraction process. This unit enables the operator to easily change the final set point by adjusting the current extracted Kappa number set point. This change must, of course, be delayed by $G2(z)$ before being compared with the actual extracted Kappa number to provide an update.

It is apparent from the foregoing description that the computer unit 11 could be either a special purpose computer, a general purpose computer or a
30 specially designed control unit with the actual functional blocks and lines as illustrated.

From a more theoretical and overall viewpoint, it is apparent that the system as described above



999950

is essentially a feed forward system with respect to the predictor 22 with a delayed measurement of the disturbance variable. This disturbance variable is, of course, the amount of lignin in the brown stock or paper pulp. The controlled variable is the brightness or extracted Kappa number of the brown stock and the manipulated variable is the percent chlorine added to the brown stock.

Figure 2 illustrates the structural details of chlorination sensor 21. Such chlorination sensor is similar in concept to a moisture sensing device disclosed and claimed in U.S. Patent 3,541,349. The sensor in essence measures the transmission of both visible and infrared light through a window 36 in the pulp transmission line 37 from the chlorine premixer 12. A light source 38 is focused by lenses 39 and 41 and chopped by chopper 42. After being transmitted through the pulp or brown stock which is flowing through the line 37, it is split into two portions by a beam splitter unit 43. One portion is filtered by a filter $\lambda 1$, focused thereafter by a lens 44 and detected by a detector 46. The other portion is filtered by a filter $\lambda 2$, focused by lens 47 and detected by a detector 48. The outputs of both detectors are amplified by amplifiers 49 and 51, demodulated by demodulator 52 and then coupled to predictor 22. Thus, the output of demodulator 52 is DS or the chlorination sensor output.

The wavelengths $\lambda 1$ and $\lambda 2$ are as illustrated in Figure 3 substantially 500 millimicrons and 1075 millimicrons. In other words, $\lambda 1$ is in the visible range and $\lambda 2$ in the near infrared frequency spectrum. The curves of Figure 3 illustrate the transmission



999950

characteristic of the unchlorinated brown stock and the brown stock after chlorination and retention times of both two minutes and 50 minutes. It is apparent that the transmission of the wavelength λ_1 will be considerably affected by the amount of brightening or bleaching of the brown stock while the transmission of the wavelength λ_2 is unaffected. Thus, the latter wavelength may be used as a reference and when compared with λ_1 will provide an indication of the chlorine
10 with the brown stock. It is also apparent that λ_1 and λ_2 , although it is believed that optimum values have been selected, may be varied somewhat from these values to achieve the desired measurement results.

The chlorination sensor will also automatically compensate for consistency changes. This is because the presence of more fibers increases the amount of lignin in the path length of the light being transmitted through the window thus making the fiber mass look darker. This, therefore, results in the controller
20 increasing the chlorine flow.

In the preferred embodiment of the present invention the operation of predictor 22 is based on the assumption that two reactions, namely oxidation and substitution, occur simultaneously in producing the bleaching of the brown stock by the chlorine. This is illustrated in Figure 4 where the amount of chlorine consumed relative to the total reaction time provides substitution and oxidation curves, the total chlorine consumed being merely the addition of these
30 two reaction curves. The substitution curve rises very rapidly relative to the oxidation curve. It is apparent that consideration of these reactions is useful in providing a mathematical model of the

999950

hypochlorous acid, HOCl, by oxidation; i.e.,

$$\frac{dL_o}{dt} = k_o [L] [HOCl] \quad (3)$$

where L is total lignin, L_o relates to the reaction by oxidation and k_o is again related to temperature by the Arrhenius equation.

The stoichiometry of the consumption of Cl_2 and HOCl by lignin is related by

$$\Delta L_n = a \Delta [Cl_2] \quad (4)$$

$$\Delta L_o = b \Delta [HOCl] \quad (5)$$

where "a" and "b" are the stoichiometric constants.

The foregoing assumptions can be used to derive a mathematical model which is used by the predictor as shown in Figure 1. For control about a given steady state condition it is assumed that a linearized approximation to the aforementioned model is an adequate representation of the system. This assumption cannot be extrapolated over wide range conditions because the process is not linear. Therefore, the linear parameters used in the linearized approximation model must be updated when a major change in the process conditions occurs.

These linear parameters are functions of wood species, retention times between chlorine addition point and sensor and between chlorine addition point and chlorination tower outlet, pH, temperature (inlet and ambient), extracted kappa number set point and percent chlorine applied.

Two methods are available to determine the parameters. The first is by plant testing which can be very time consuming if operating conditions vary widely. The second method available to determine the foregoing parameters is by simulation of the process



999950

using a mathematical model.

There are two basic versions of the mathematical model. First, it may be based on a single "pseudo" chemical reaction. The second which is used in the preferred embodiment of the present invention is based on the two foregoing parallel chemical reactions including the effect of liquid phase chemical equilibrium.

The model is in the form of a computer program. It is believed that the parallel chemical reaction model

10 provides a better fit to experimental data over the full range of retention times since it accounts for the rapid substitution reaction which is observed in the data during the first few seconds or minutes after chlorine addition. The model itself includes equations (1), (2), (3), (4) and (5).

Initially, the following conditions are set: L , L_0 , initial chlorine concentration, K_T , k_s and k_0 . K_T , k_s and k_0 are calculated from the specified reaction temperature.

20 The following steps are then performed:

(a) Calculate the actual concentration of Cl_2 and NOCl from the hydrolysis equation (1).

(b) Over the integration interval Δt calculate the amount of lignin reacted by

$$\Delta L_g = k_g [Cl_2] [L_g] \Delta t \quad (5)$$

$$\Delta \Gamma_{\text{т}} \approx k_{\text{д}} \{ \text{HOC} \} [L] \Delta t \quad (7)$$

(c) Calculate the values of lignin by

$$L_8 + L_8 \sim \Delta L_8 \quad (8)$$

$$L + \dot{L} = (\Delta L_p + \delta L_0) \quad (9)$$

30 and consumption of Cl_2 and HOCl by equations (4)
and (5).

(d) Based on changes in Cl_2 , HOCl , Cl^- and H^+ recomputes Cl_2 and HOCl for Δt using the equilibrium



999950

equation (1).

(c) Repeat steps (b), (c) and (d) for the desired total time. This time, of course, includes the retention times of the premixer and the chlorine tower. The results of this solution procedure is to calculate the profile of Cl_2 consumption and amount of lignin reacted and therefore the color, DS, of the pulp (which is linearly related to the amount of lignin).

From the foregoing simulation the linear parameters K_1 through K_4 can be derived for any given set of conditions including a change in rotation time since the additions of Δt compensate for rotation time. Also changes in temperature are compensated since K_T , K_O and K_g are related to temperature. The four parameters are the following:

$$K_1 = \frac{\Delta DS}{\Delta CL} \quad (10)$$

$$\kappa_2' = \frac{\Delta D_2}{\Delta D_1} \quad (11)$$

$$K_3 = \frac{\Delta EK}{\Delta CL} \quad (12)$$

$$\kappa'_g = \frac{\Delta \Pi_K}{\Delta \Pi_K} \quad (13)$$

where CI is equal to the percent chlorine applied, BK is equal to the brown stock Kappa number inputted into the process, EK is equal to the extracted Kappa number, and DS is the digital chlorination sensor output. As illustrated in Figure 1, the four parameters K_1 through K_4 are inputted into the predictor in an off-line mode. At the present time this is believed to be the most satisfactory method although an on-line mode might be used when needed for certain types of processes.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. In a method of controlling the extracted Kappa number of paper pulp in a process having a continuous flow of such pulp through premixing means where a bleaching agent is added and partial bleaching takes place and through reactor means to substantially complete such bleaching said pulp being susceptible to the concentration of lignin which is unmeasurable by itself which affects said Kappa number and where said pulp is subjected to said bleaching agent in said premixing means and said reactor means which affects said Kappa number said method comprising the following steps: sensing a color value related to said Kappa number after said material has been subjected to said bleaching agent in said premixing means; providing a prediction model which in response to said sensed value, the amount of bleaching agent added, and temperature and retention time in said premixer and reactor means, predicts the future value of said Kappa number after being withdrawn from means relative to the present amount of bleaching agent being added; and comparing said predicted future value after being withdrawn from the reactor means with a set point reference and changing said amount of bleaching agent in response to a lack of comparison.

2. A method according to Claim 1 where said value related to said Kappa number is measured after said pulp has been subjected to said bleaching agent in said premixing means for a relatively short time period as compared to said retention time of said reactor means which is a relatively long time period.

3. A method according to Claim 1 where said color

value related to said Kappa number is sensed by measuring the transmission of a selected wavelength of visible light through said pulp, measuring the transmission of a selected wavelength of infrared through said pulp and comparing said two measurements.

4. A method as in Claim 3 where said visible wavelength is substantially 550 millimicrons and said infrared wavelength is substantially 1075 millimicrons.

5. A method as in Claim 1 where said bleaching agent is chlorine which is consumed in accordance with the parallel reaction of lignin with chlorine in both oxidation and substitution modes said reactions being affected by variations in said temperature and retention times said prediction model being responsive to said variations.

6. A method of continuously controlling the injection of a bleaching agent into a moving stream of brown stock for producing a desired brightness in the brown stock such brown stock after said injection being retained in reactor means a predetermined retention time to substantially complete the bleaching and thereafter withdrawn from said reactor at a continuous rate, said method comprising the steps of: sensing the color (DS) of said stock after said bleaching agent is injected but before said stock is placed in said reactor means, predicting the extracted kappa number, \hat{K} , of said stock after being withdrawn from said reactor based on the current values of percent bleaching agent applied (CL) and the darkness of the brown stock (\hat{BK}) by

$$\hat{BK} = \frac{DS}{K_2} - G_1(z) \frac{K_1}{K_2} CL \quad (1)$$

and

$$\hat{BK} = G_1'(z) K_2 CL + K_1 \hat{K} \quad (2)$$

999950

where \hat{BK} is the predicted darkness of the brown stock lagged by the dynamics $G1'(z)$ and substituting equation (1) in (2)

$$\hat{BK} = \frac{K_1'}{K_2'} US + G1'(z) \left(K_3' - \frac{K_4' X_1'}{K_2'} \right) CL$$

where $G1'(z)$ is a z type function reflecting lag response with respect to a change in brightness sensed after addition of bleaching agent where

$$K_1' = \frac{\Delta DS}{\Delta CL}$$

$$K_2' = \frac{\Delta DS}{\Delta BK}$$

$$K_3' = \frac{\Delta BK}{\Delta CL}$$

$$K_4' = \frac{\Delta EX}{\Delta BK}$$

said foregoing parameters K_1' through K_4' being derived from a mathematical model based on the parallel reaction of brown substance in said brown stock with said bleaching agent in both oxidation and substitution modes said derivation being based on ambient temperature of said brown stock and said retention time in said reactor means along with other parameters of the method, and comparing BK with a set point reference and changing the injection of said bleaching agent in response to a lack of comparison.



Latent Agents
Smart & Beggars


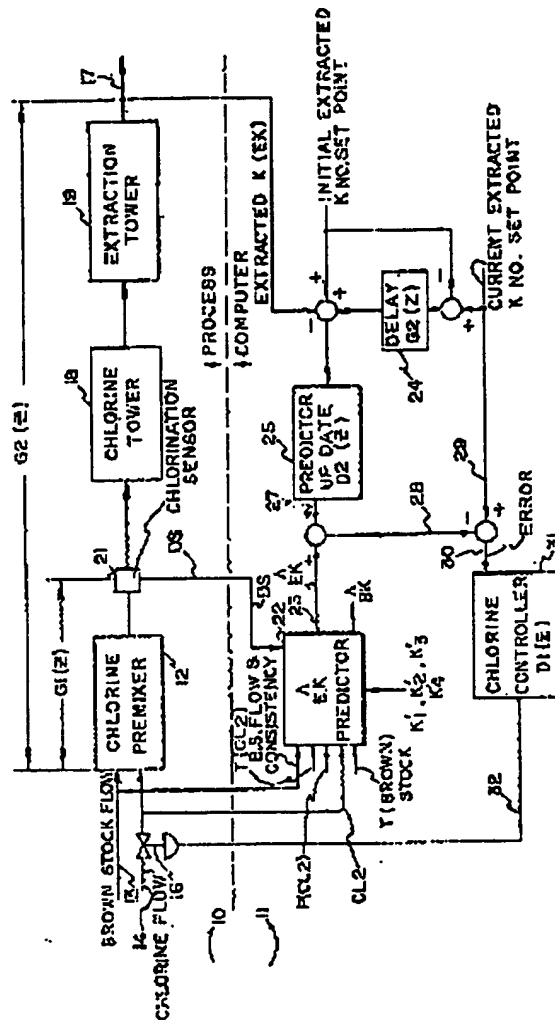


FIG. 1



FIG 2

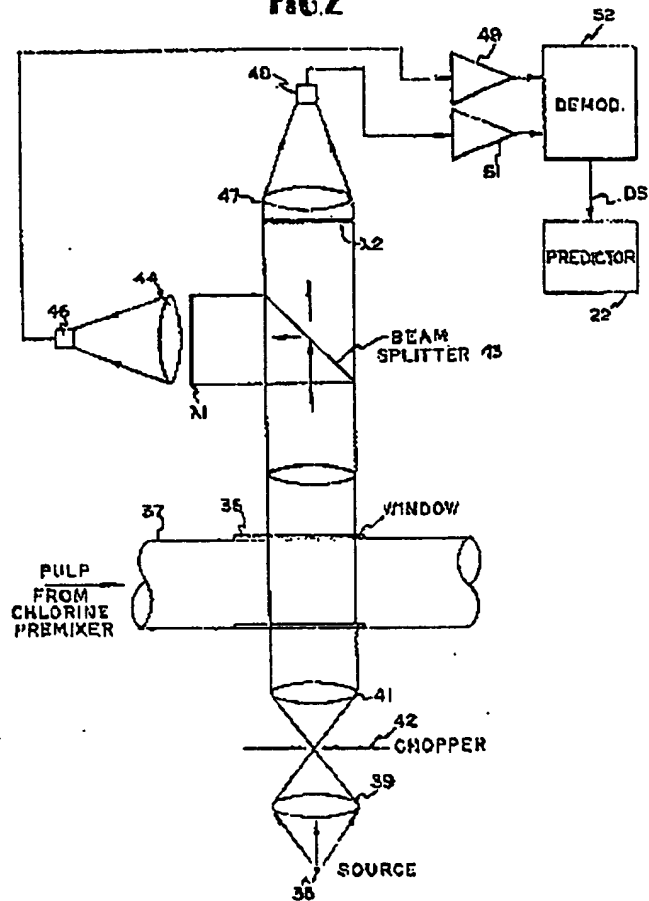

*Patent Agents
Smead & Ruggan*



FIG. 4



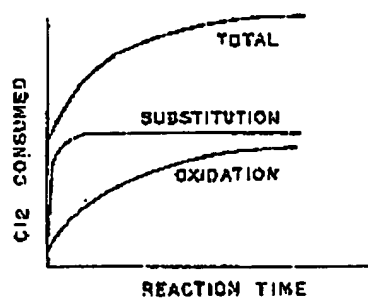


FIG. 3

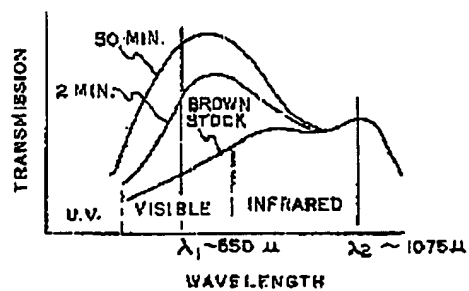

Patent Agents
Ames & Beggs

FIG 5

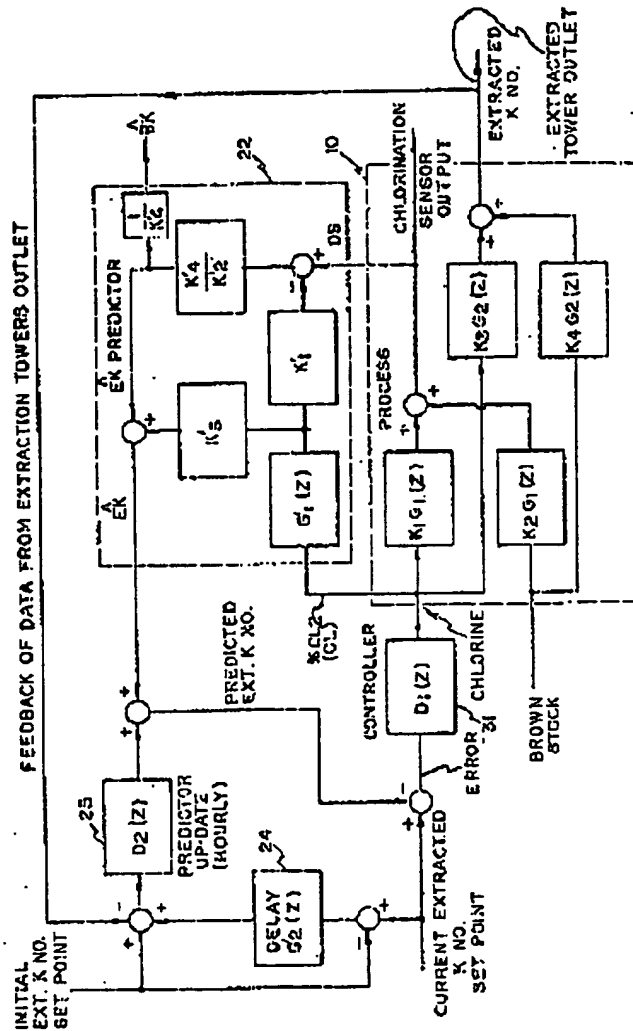

Patent Agents
Smart & Beppin

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.